

UNIQUE SOLUTIONS MADE BY THE SPECIALIST



Joh. Heinr. Bornemann GmbH

Industriestraße 2
31683 Obernkirchen
Germany

Fon: +49 5724 390-0
Fax: +49 5724 390-290
info@bornemann.com
www.bornemann.com



Germany – Headquarter

CANADA

Bornemann Inc.

320 441, 5th Avenue S.W.
Calgary, Alberta
Canada T2P 2V1
CANADA
Fon: +1 403 294 0777
Fax: +1 403 262 4073
info.ca@bornemann.com
www.bornemann-ca.com

USA

Bornemann Pumps, Inc.

10375 Richmond Ave,
Suite 1575
Houston, Texas 77042
USA
Fon: +1 832 320 25 00
info.usa@bornemann.com
www.bornemann-usa.com

Parts and new pump stocking
Bornemann Inc.

P.O. Box 1769
Matthews, NC 28106
USA
Fon: +1 704 849 86 36
Fax: +1 704 849 86 37
info.usa@bornemann.com
www.bornemann-usa.com

ARGENTINA

Bombas Bornemann S.R.L.

Armenia 2898
B1605CDP Munro
Prov. Buenos Aires
ARGENTINA
Fon: +54 11 475 680 08
Fax: +54 11 475 655 41
info.ar@bornemann.com
www.bornemann-ar.com

MEXICO

Bornemann S.A. de C.V.

Castillo de Cantburry 16
52938 Atizapan, Estado de Mexico
MEXICO
Fon: +52 55 5808 0875
Fax: +52 55 5808 1108
info.mx@bornemann.com
www.bornemann-mx.com

SINGAPORE

Bornemann Pumps Asia Pte. Ltd.

25 Intern. Business Park
German Centre, # 04-11/12
Singapore 609916
SINGAPORE
Fon: +65 656 167 82/3
Fon: +65 656 159 78
Fax: +65 656 167 84
info.sg@bornemann.com
www.bornemann-sg.com

CHINA

**Bornemann Pumps & Systems
(Tianjin) Co., Ltd.**

Jinbin General Building No. 6,
No. 45 Muning Road
TEDA, Tianjin
P. R. China 300457
CHINA
Fon: +86 22 662 978 00
Fax: +86 22 253 267 99
info.service@bornemann-cn.com
www.bornemann-cn.com

**Bornemann Pumps International
Tianjin**

Room 1101
Tianjin Binjiang International Hotel
No. 105 Jianshe Road
Heping District, Tianjin
CHINA
Fon: +86 22 5881 2997
Fax: +86 22 5881 2996
info.sales@bornemann-cn.com
www.bornemann-cn.com

TWIN SCREW PUMPS TYPE SERIES SLI

MAXIMUM PERFORMANCE FOR HIGH DEMANDS



Bornemann SLI twin screw pumps are single-flow and self-priming. SLI pumps feature no metal-to-metal contact between the pump screws and the housing. This enables the conveyance of non-lubricating or corrosive and contaminated materials. As the pump rotates, the intermeshing of the two screws along with the pump housing form chambers. These chambers fill with the pumped fluid and move it from the suction side of the pump to the higher pressure discharge side of the pump.

Very flexible: The pump is designed to allow for reverse flow by simply changing the shaft direction. The suction becomes the discharge and vice versa, all without any modifications to the pump.

This axial system enables cautious, low-pulsation conveyance. It protects the media and maintains size, surface and visual integrity of the products




MODULAR SYSTEM

Bornemann SLI pumps provide you with a range of convincing advantages that together result in the highest possible cost and production efficiency.

Using a modular system, Bornemann offers three pump sizes and different screw sets that cover a conveyance range of 1 m³/h to 180 m³/h. The different

screw sizes make it possible to handle a wide range of flow capacities with the same viscosities, operating pressures and rotation speeds.

Very different media can be conveyed with one pump.

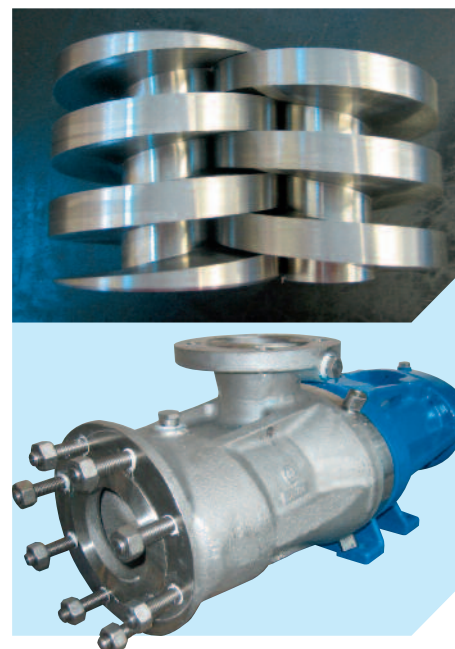


ADVANTAGES

- Well suited for fluids with low and high viscosity
- Modular system – the combination of different feedscrews covers a wide spectrum with only three scales
- Self-priming
- Equipment available according to ATEX and TA Air
- Contact-free intermeshing screws
- Abrasion-free
- Smooth handling
- Low-pulsation conveyance
- Dry running protection
- Easy to maintain by single-flow

TECHNICAL DATA

SLI 80 | SLI 125 | SLI 180




Capacity	1 - 180 m³/h (1 - 792 gpm)
Differential pressure	16 bar (232 psi)
Speed	up to 3,000 rpm
Viscosity	1 - 100,000 cSt
Suction lift	up to 8 m (26 ft)
Rotating direction	reversible
Heating temperature	120 °C (248 °F)
Material	GGG-40 and 1,4408

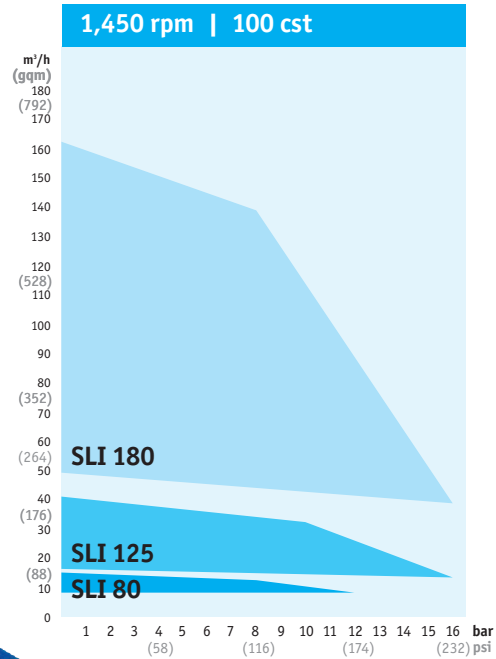


Flange Connection

SLI 80	
DIN PN 16	80/50
ANSI 150 lbs	3"/2"
SLI 125	
DIN PN 16	100/80
ANSI 150 lbs	4"/3"
SLI 180	
DIN PN 16	150/150
ANSI 150 lbs	6"/6"


SLI 180 with bypass – different views

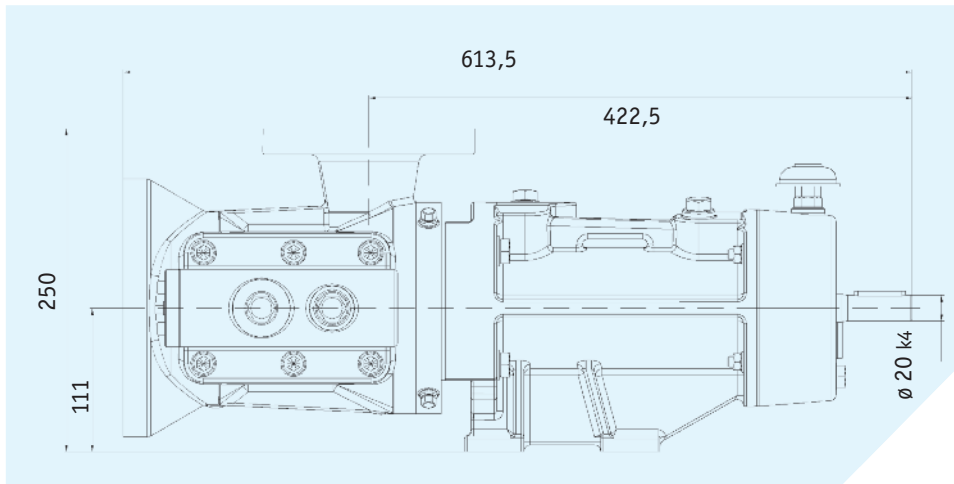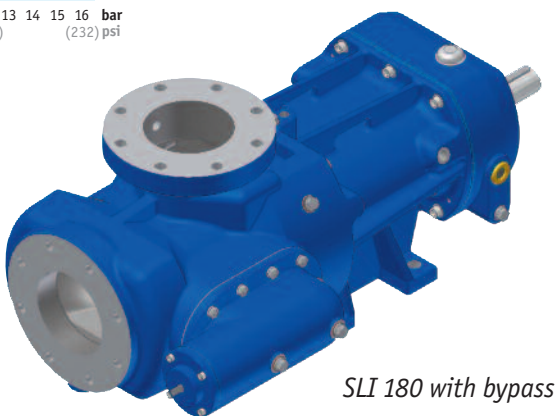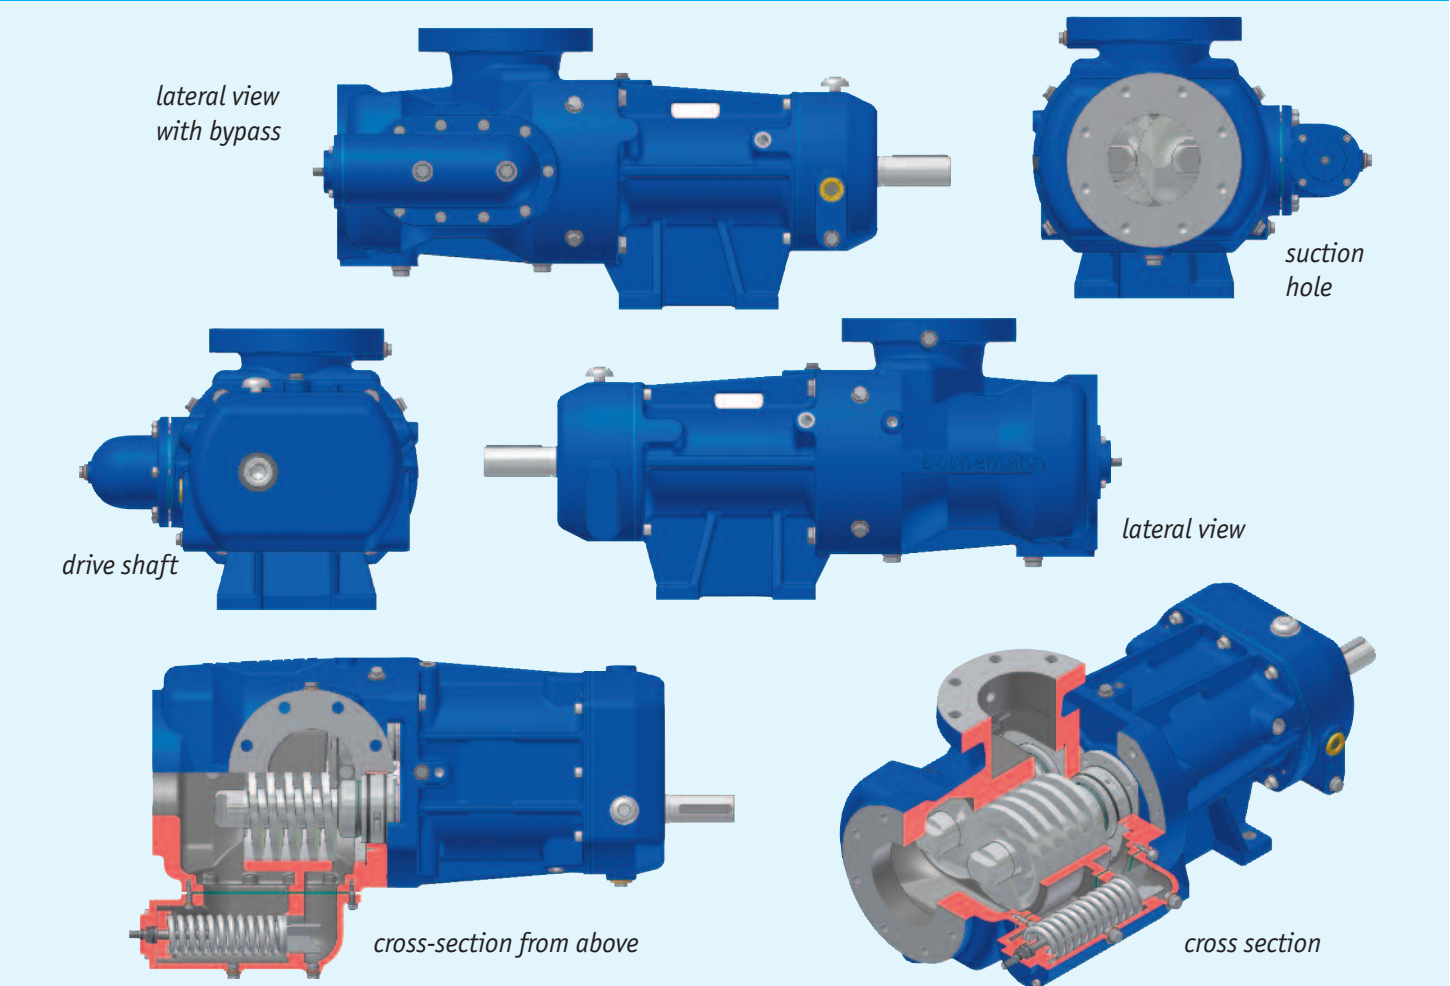

Twin Screw Pump SLI 80 (with bypass)

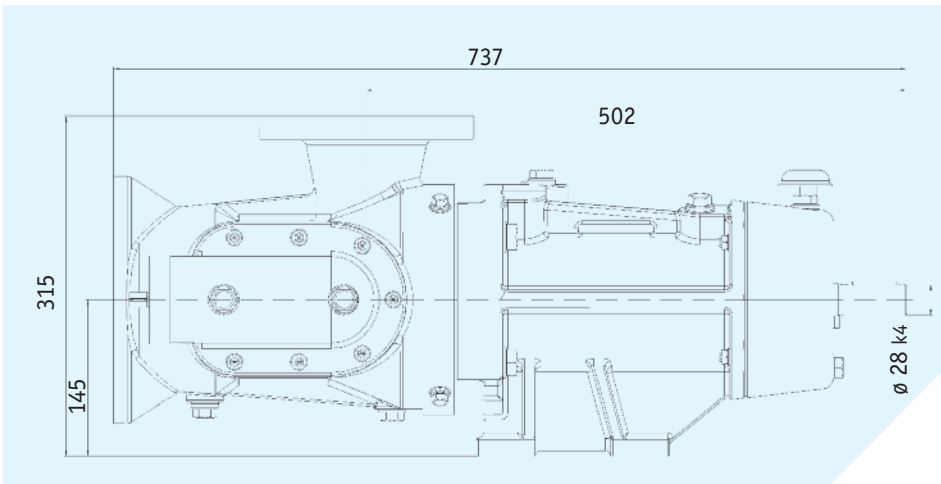


Twin Screw Pump SLI 125 (with bypass)

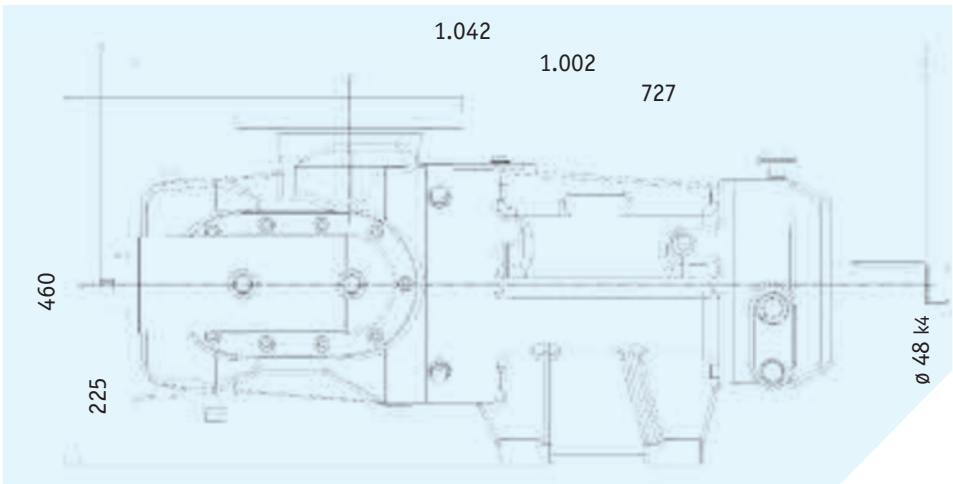

Twin Screw Pump SLI 180 (with bypass)

The all-round-product for
transfer, dosing, processing
and unloading duties

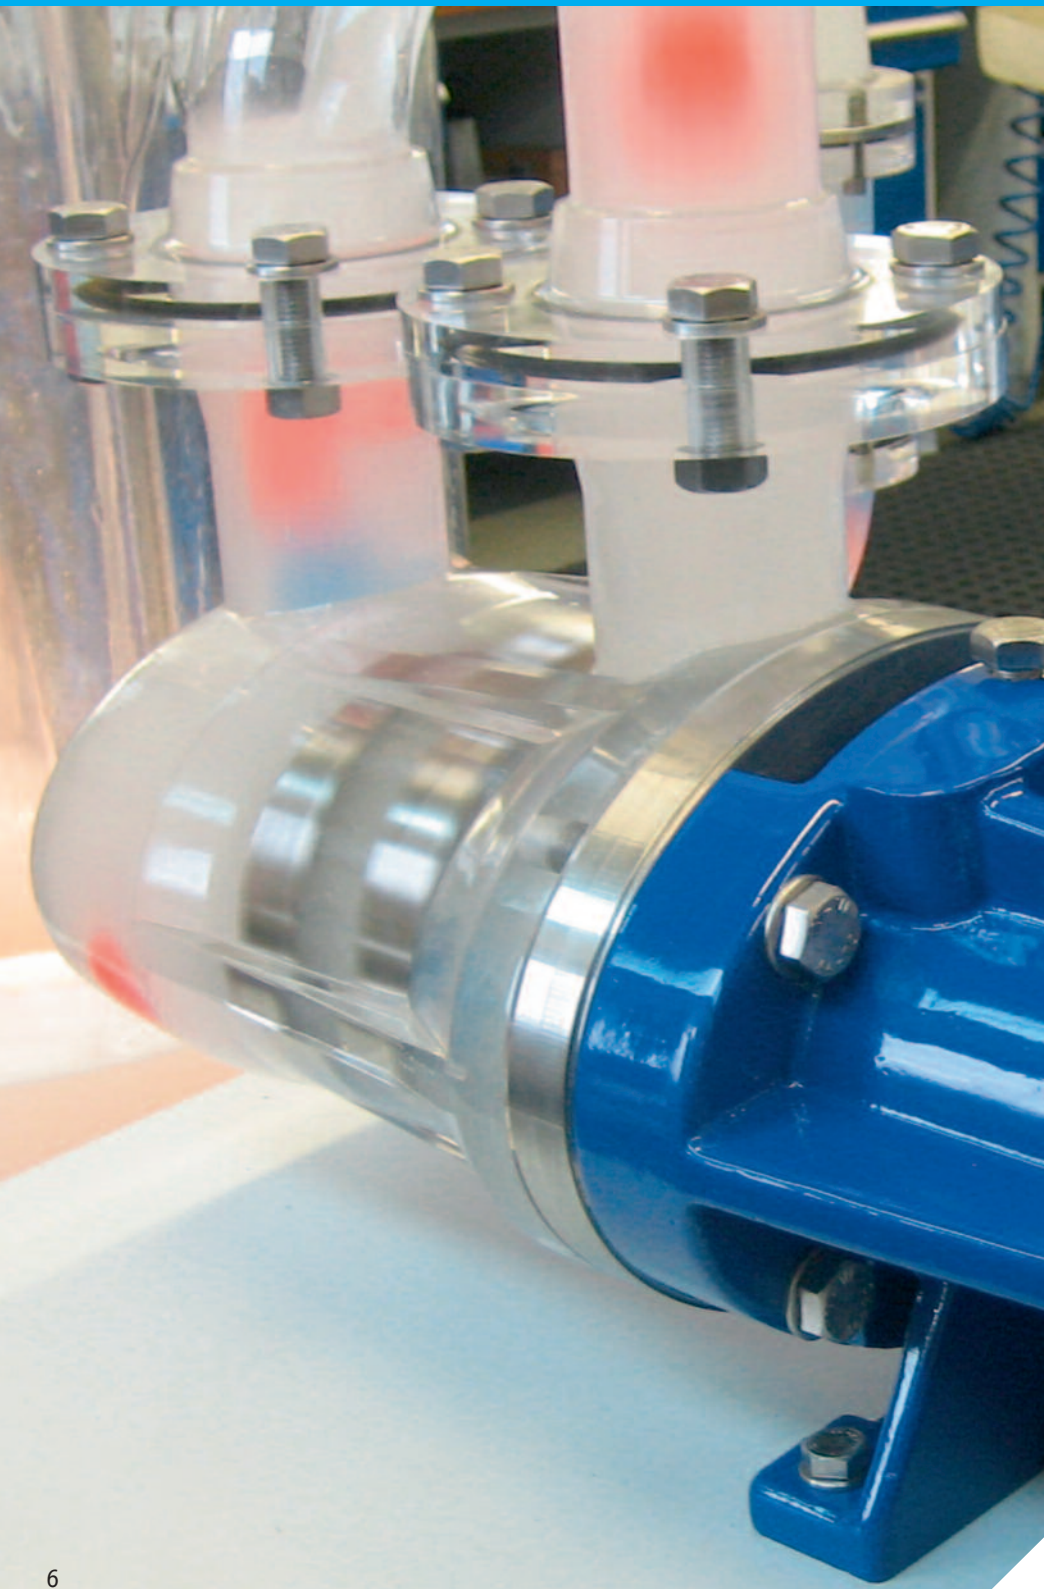

BORNEMANN SLI PUMPS FOR MANY FIELDS OF APPLICATION AND DEMANDS

CHEMICALS INDUSTRY

- Colours and paints industry
- Building chemicals
- Finished products (such as paints, water-soluble paints and paints with solvents, isocyanates, glues)
- Raw materials (such as resins, polyols, binding agents, solvents)
- Cosmetics and pharmaceuticals industry

POWER STATIONS, REFINERIES, TANK STORAGES

- Unloading systems for trucks
- Unloading stations for tank wagons
- Systems for emptying residues from pipelines and tanks

SHIPBUILDING

- Emptying tanks (stripping pump)

RECYCLING AND ENVIRONMENT

- Pyrolysis systems (thermal processing)
- Upgrading systems for waste water (e.g. colours and paints industry)
- Upgrading systems for old oils (condensate systems)
- Filtration technologies

OIL INDUSTRY

- Crude oil, water
- Multiphase-mixtures
- Contaminated media